




## DealerSpec™ PB-M Polymer-Based Mortar System

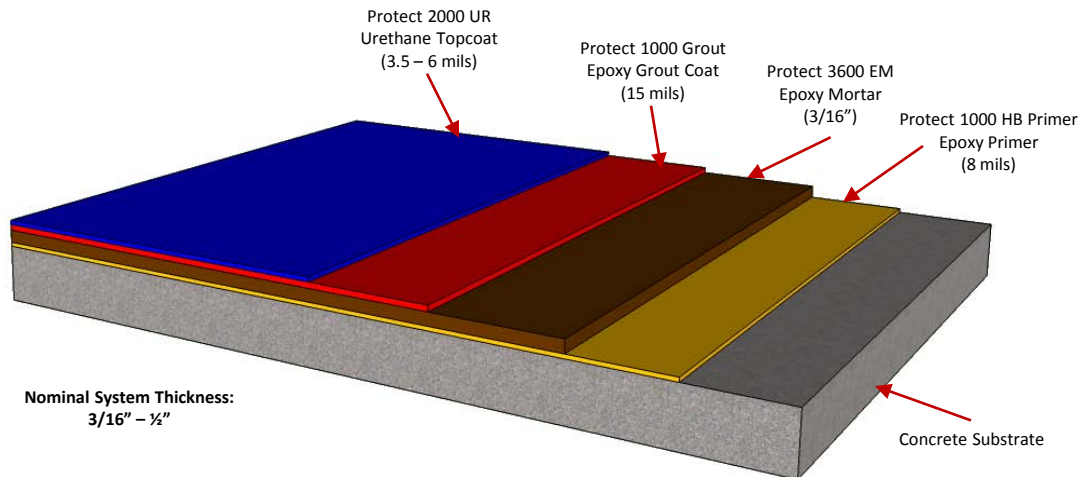

### System Description:

A high-performance polymer-based mortar/resurfacer system ranging from 3/16" to 1/2" in thickness. This system resurfaces old, damaged concrete with a new stronger, more impact-resistant surface. This system produces a heavy-duty, wear-resistant surface that is ideal for automotive production or heavy truck maintenance areas subject to extreme conditions.

### System Advantages:

- Resurfaces old or worn concrete
- No solvent odor
- Topcoat available in array of safety textures
- Quick turnaround, minimal downtime
- Excellent chemical, impact and abrasion resistance
- For heavy-duty applications

### System Installation Overview:

1. Apply Protect 1000 HB Primer to properly prepared substrate and allow to cure
2. Apply 3600 EM epoxy mortar and allow to cure
3. Apply Protect 1000 Grout epoxy grout coat and allow to cure
4. Apply Protect 2000 UR topcoat and allow to cure



All DealerSpec floor coating systems can be enhanced with PIP's proprietary Gloss-Grip Technology. This additive greatly enhances both the safety and wear characteristics of your floor coating system while retaining a slip-resistant, yet high-gloss, finish that is easy to clean and maintain. These systems not only exhibit longer service lives; they help you save money by reducing maintenance costs.