


DecoSpec ChromaFlake DB Decorative Vinyl Flake Double Broadcast System

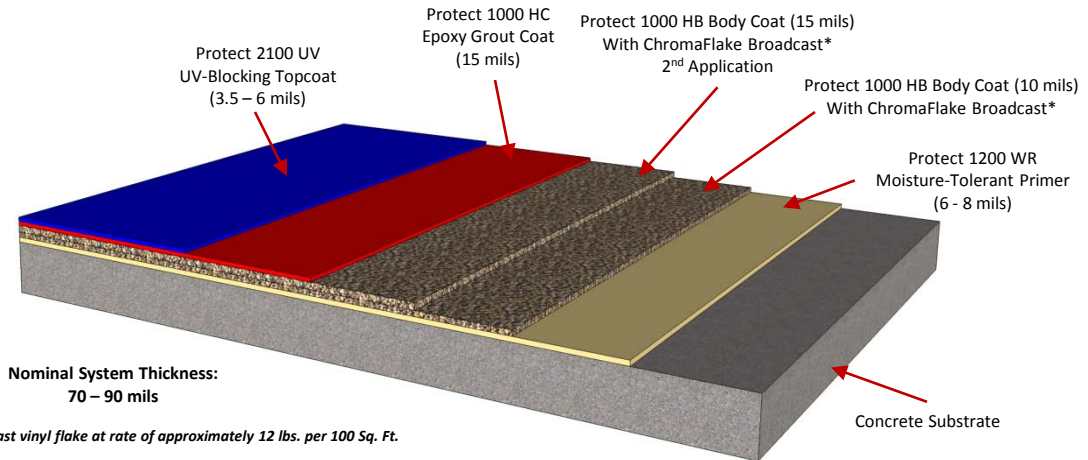

System Description:

A polymer-based decorative system consisting of a moisture-tolerant primer, followed by two applications of an epoxy basecoat with vinyl flakes broadcast into the wet epoxy. The system is grout coated with a high-clarity epoxy and top coated with a high-performance UV-blocking urethane. This system produces a decorative, chemical-resistant, easy-to-clean surface that is ideal for showrooms, locker rooms, lobbies, cafeterias and restrooms where functionality, safety and aesthetics are important. Double broadcast decorative systems are well-suited for restoration/rehab projects where the concrete may have experienced moderate use.

System Advantages:

- Wide array of flake color and blend combinations (See DecoSpec Decorative Media Guide)
- Very low-odor
- Excellent chemical-resistance
- Enhanced aesthetics
- Suited for restoration/rehab projects

System Installation Overview:

1. Apply Protect 1200 WR primer and allow to cure
2. Apply Protect 1000 HB with ChromaFlake broadcast*, allow to cure
3. 2nd Application of Protect 1000 HB with ChromaFlake broadcast*, allow to cure
4. Apply Protect 1000 HC sealer coat over broadcast layers and allow to cure
5. Apply Protect 2100 UV topcoat and allow to cure



All DecoSpec floor coating systems can be enhanced with PIP's proprietary Gloss-Grip Technology. This additive greatly enhances both the safety and wear characteristics of your floor coating system while retaining a slip-resistant, yet high-gloss, finish that is easy to clean and maintain. These systems not only exhibit longer service lives; they help you save money by reducing maintenance costs.