


InhibiStat BC-FS

Fast-Cure ESD-Control Broadcast System

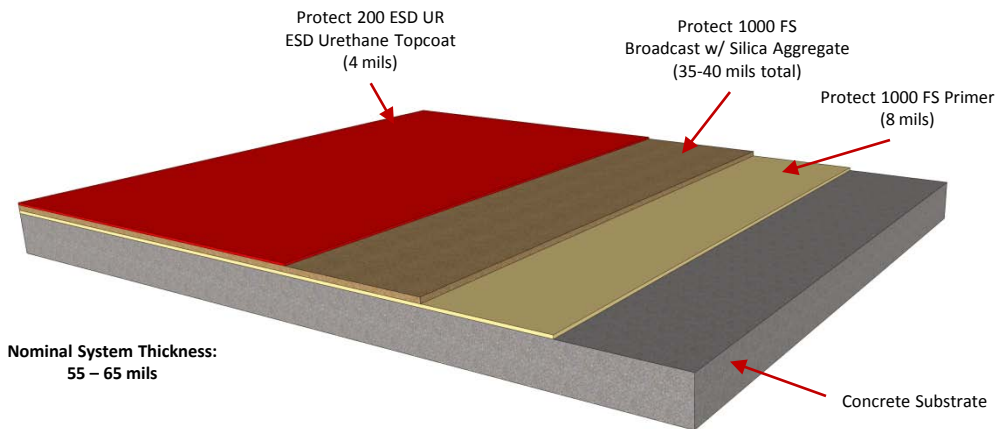

System Description:

An ESD-control broadcast floor system consisting of a fast-setting epoxy primer, intermediate coat, silica sand broadcast, fast set grout coat, and top coat of an ESD high-performance urethane. This easy-to-clean, UV-resistant system is ideal for areas exposed to general traffic which require ESD protection and where minimal shutdown windows exist and quick return to service is a requirement.

ESD-Control Properties:

All InhibiStat systems have been designed to meet and/or exceed current compliance standards (ANSI/IEC).

- Available in Static Dissipative or Conductive Ranges
- Dissipates 5000 volt charge to 0 volts in less than 0.1 second
- Extremely low Body Voltage Generation (BVG)

System Advantages:

- Very low odor
- Quick turnaround for minimal shutdown windows
- UV-resistant
- Good resistance to most common chemicals and cleaners
- Available in a wide array of colors

System Installation Overview:

1. Apply Protect 1000 FS primer to properly prepared substrate and allow to cure
2. Apply Protect 1000 FS body coat broadcast with silica aggregate and allow to cure
3. Apply Protect 200 ESD UR topcoat and allow to cure