


## InhibiStat HB-FS

### Fast-Cure ESD-Control High-Build Coating System

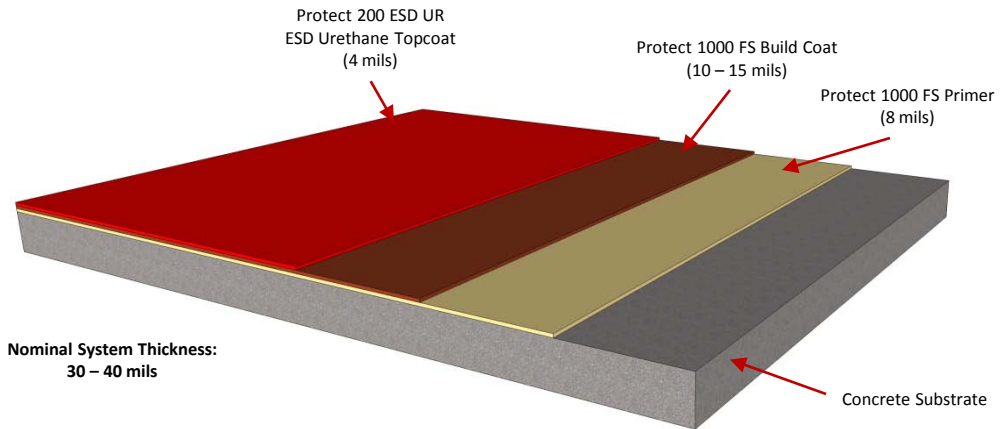

#### System Description:

This ESD-control system consists of a fast-setting epoxy primer and intermediate coat, and top coat of an ESD high-performance urethane. This easy-to-clean, ESD, light-reflective, UV-resistant system is ideal for general use areas exposed to general traffic. This system is suited for areas with minimal shutdown windows where quick return to service and ESD protection is a requirement.

#### ESD-Control Properties:

All InhibiStat systems have been designed to meet and/or exceed current compliance standards (ANSI/IEC).

- Available in Static Dissipative or Conductive Ranges
- Dissipates 5000 volt charge to 0 volts in less than 0.1 second
- Extremely low Body Voltage Generation (BVG)

#### System Advantages:

- Very low odor
- Quick turnaround for minimal shutdown windows
- UV-resistant
- Good resistance to most common chemicals and cleaners
- Zero VOC
- Available in a wide array of colors
- USDA-compliant

#### System Installation Overview:

1. Apply Protect 1000 FS primer to properly prepared substrate and allow to cure
2. Apply Protect 1000 FS build coat and allow to cure
3. Apply Protect 200 ESD UR topcoat and allow to cure