


InhibiStat HB-Xtreme

Extreme Wear ESD-Control High-Build Coating System

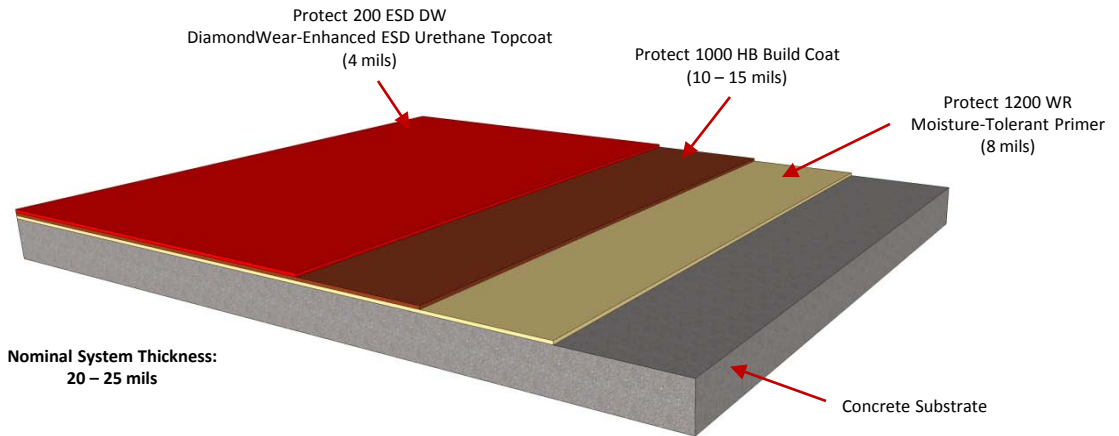

System Description:

This ESD-control system consists of a moisture-tolerant primer, an intermediate coat of high-build epoxy, and top coat of a high performance ESD urethane enhanced with DiamondWear Extreme Wear and Abrasion Additive. This extreme wearing coating system is suited for areas exposed to heavy wheel and foot traffic, such as aisleways and warehouse areas requiring ESD protection. This system exhibits a satin finish and can be pigmented in a vast array of colors.

ESD-Control Properties:

All InhibiStat systems have been designed to meet and/or exceed current compliance standards (ANSI/IEC).

- Available in Static Dissipative or Conductive Ranges
- Dissipates 5000 volt charge to 0 volts in less than 0.1 second
- Extremely low Body Voltage Generation (BVG)

System Advantages:

- Light-reflective satin texture
- Resists dulling of surface
- Up to 300% greater wear than standard epoxy
- Longer service life
- Lower maintenance costs
- Available in a wide array of colors

System Installation Overview:

1. Apply Protect 1200 WR primer to properly prepared substrate and allow to cure
2. Apply Protect 1000 HB build coat and allow to cure
3. Apply Protect 200 ESD DW topcoat and allow to cure