


InhibiStat MT-G General Use ESD-Control Mortar System

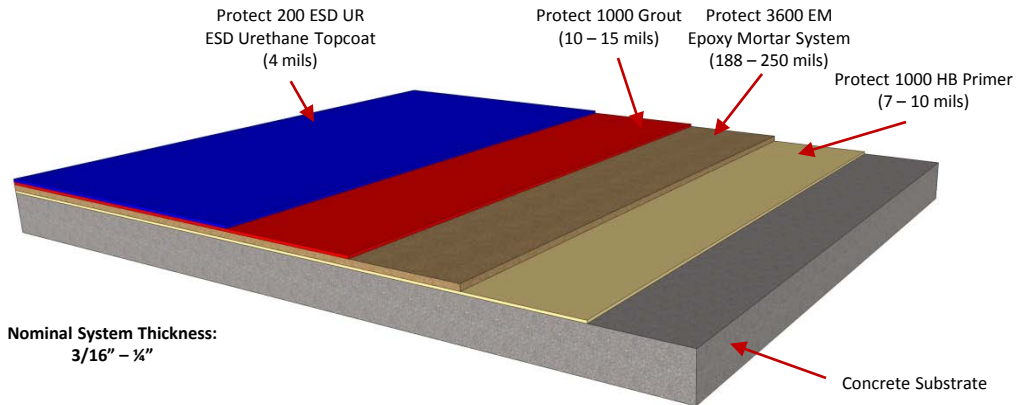

System Description:

An ESD-control, general use heavy-duty mortar system consisting of an epoxy primer, a trowel-applied epoxy mortar, epoxy grout coat and top coat with a high-performance ESD urethane. This mortar system will resurface badly damaged concrete to a new, more durable surface. This system is ideal for industrial areas exposed to heavy use and forklift traffic requiring ESD protection.

ESD-Control Properties:

All InhibiStat systems have been designed to meet and/or exceed current compliance standards (ANSI/IEC).

- Available in Static Dissipative or Conductive Ranges
- Dissipates 5000 volt charge to 0 volts in less than 0.1 second
- Extremely low Body Voltage Generation (BVG)

System Advantages:

- Very durable
- Excellent chemical resistance
- Resurfaces damaged concrete substrates
- Very good impact and abrasion resistance
- Available in a wide array of colors

System Installation Overview:

1. Apply Protect 1000 HB primer to properly prepared substrate and allow to cure
2. Apply Protect 3600 EM epoxy mortar system and allow to cure
3. Apply Protect 1000 Grout and allow to cure
4. Apply Protect 200 ESD UR topcoat and allow to cure