


## InhibiStat MT-MB

### Moisture-Breathable ESD-Control Mortar System

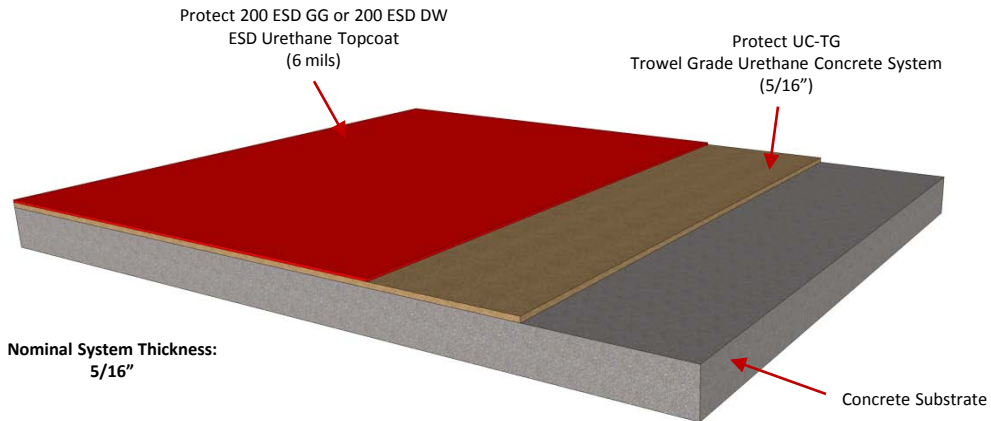

#### System Description:

An ESD-control, moisture-breathable, resurfacer system consisting of a self-priming, trowel grade, thermal shock-resistant urethane concrete overlay. The system is top coated with a high-performance ESD urethane. This system exhibits thermal expansion rates similar to that of concrete, making it an ideal choice for heavy-duty areas exposed to thermal cycling from hot and cold-water washdowns requiring ESD protection. Additionally, this system will allow pass through of moisture vapor transmission.

#### ESD-Control Properties:

All InhibiStat systems have been designed to meet and/or exceed current compliance standards (ANSI/IEC).

- Available in Static Dissipative or Conductive Ranges
- Dissipates 5000 volt charge to 0 volts in less than 0.1 second
- Extremely low Body Voltage Generation (BVG)

#### System Advantages:

- Self-priming
- Self-leveling
- Moisture-breathable
- Virtually odorless
- Durable, heavy-duty system
- Excellent thermal-shock resistance up to 250°F
- Easy to clean and maintain

#### System Installation Overview:

1. Apply Protect UC-TG trowel grade urethane concrete system and allow to cure.
2. Apply Protect 200 ESD GG or 200 ESD DW topcoat and allow to cure.