


## InhibiStat SL-CR

### Chemical-Resistant ESD-Control Slurry System

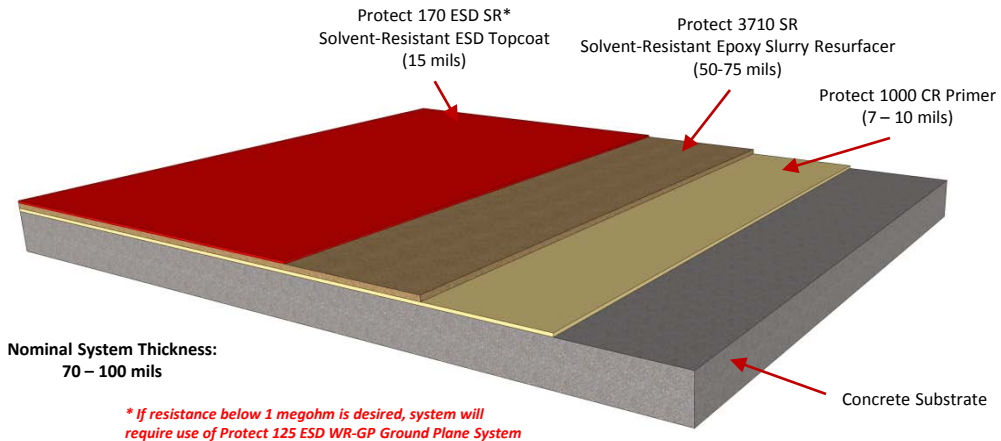

#### System Description:

An ESD-control slurry system consisting of a chemical-resistant epoxy primer, an intermediate epoxy novalac slurry resurfacer, and top coat of a highly solvent and chemical-resistant ESD epoxy novalac. This floor system restores old or damaged concrete and is suited for areas exposed to various chemicals including strong acids, caustics and solvents requiring ESD protection.

#### ESD-Control Properties:

All InhibiStat systems have been designed to meet and/or exceed current compliance standards (ANSI/IEC).

- Available in Static Dissipative or Conductive Ranges
- Dissipates 5000 volt charge to 0 volts in less than 0.1 second
- Extremely low Body Voltage Generation (BVG)

#### System Advantages:

- Available in a wide array of colors
- Restores old or damaged concrete
- Rapid cure
- Extremely hard, semi-gloss finish
- Excellent chemical resistance including acids, caustics and solvents

#### System Installation Overview:

1. Apply Protect 1000 CR primer to properly prepared substrate and allow to cure
2. Apply Protect 3710 SR solvent-resistant epoxy slurry resurfacer and allow to cure
3. **If resistance below 1 megohm is required, apply Protect 125 ESD WR-GP ground plane**
4. Apply Protect 170 ESD SR topcoat and allow to cure