


## InhibiStat SL-G General Use ESD-Control Slurry System

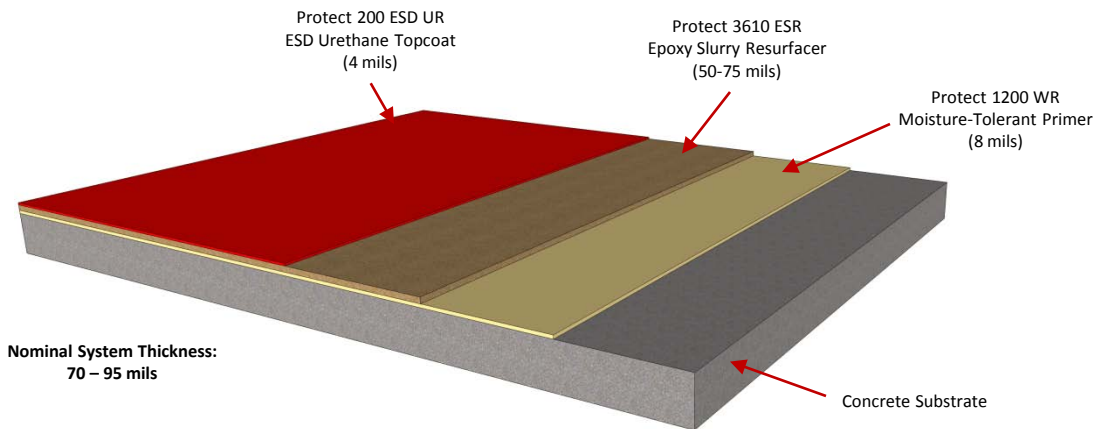

### System Description:

This system consists of a moisture-tolerant primer, an epoxy slurry resurfacer and top coat of a high performance ESD urethane. This general use system can be pigmented in a variety of colors, and features good chemical and abrasion resistance. Suited for use in areas where the concrete slab is worn or slightly damaged requiring ESD protection.

### ESD-Control Properties:

All InhibiStat systems have been designed to meet and/or exceed current compliance standards (ANSI/IEC).

- Available in Static Dissipative or Conductive Ranges
- Dissipates 5000 volt charge to 0 volts in less than 0.1 second
- Extremely low Body Voltage Generation (BVG)

### System Advantages:

- Extremely low odor
- Self levels to a smooth, glossy surface
- Good chemical and abrasion resistance
- Restores old or damaged concrete
- Resists staining from general cleaning chemicals
- Available in a wide array of UV-stable colors

### System Installation Overview:

1. Apply Protect 1200 WR primer to properly prepared substrate and allow to cure
2. Apply Protect 3610 ESR epoxy slurry resurfacer and allow to cure
3. Apply Protect 200 ESD UR topcoat and allow to cure