


## InhibiWear BC-FS Fast-Cure Broadcast System

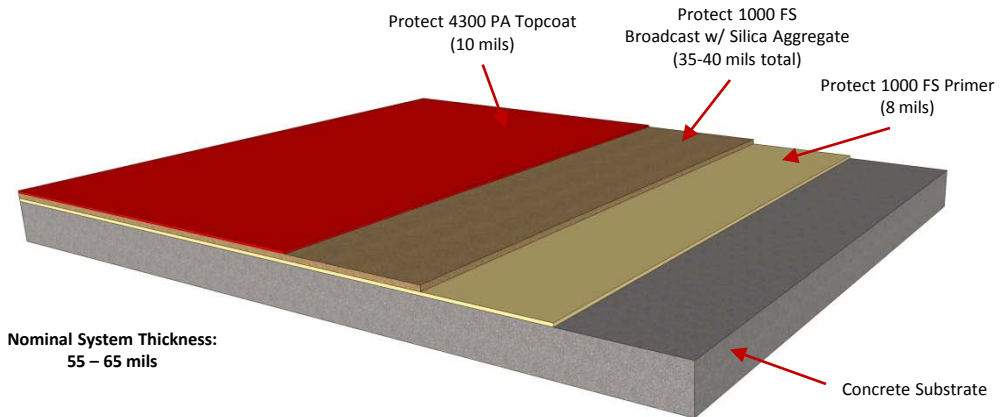

### System Description:

A broadcast floor system consisting of a fast-setting epoxy primer followed by an intermediate fast-setting epoxy broadcast with silica aggregate. The system is top coated with a fast-curing polyaspartic topcoat. This easy-to-clean, light-reflective, UV-resistant system is ideal for general shop areas exposed to general traffic. This system is suited for areas with minimal shutdown windows where quick return to service is a requirement.

### System Advantages:

- Very low odor
- Quick turnaround for minimal shutdown windows
- UV-resistant
- Good resistance to most common chemicals and cleaners
- Available in a wide array of colors

### System Installation Overview:

1. Apply Protect 1000 FS primer to properly prepared substrate and allow to cure
2. Apply Protect 1000 FS body coat broadcast with silica aggregate and allow to cure
3. Apply Protect 4300 PA topcoat and allow to cure