


## InhibiWear BC-Flex Flexible Broadcast System

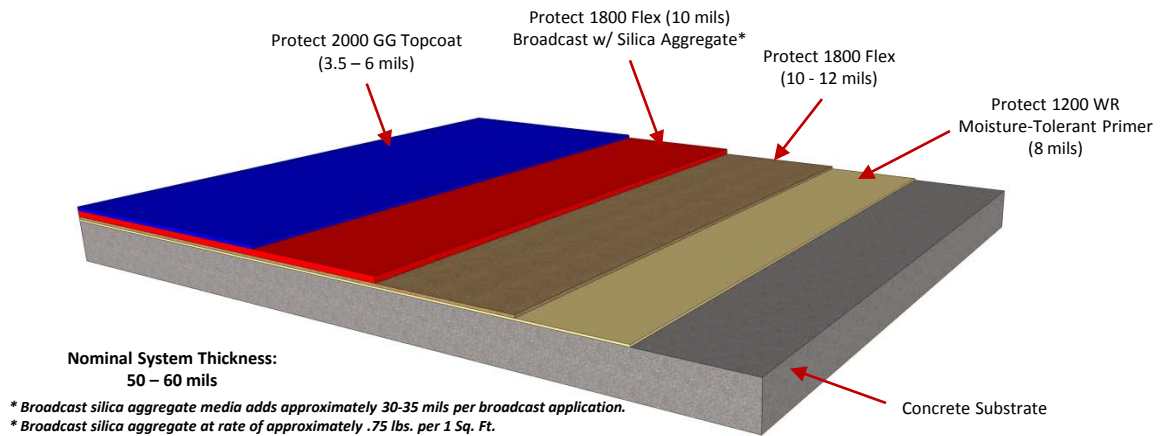

### System Description:

A flexible broadcast system consisting of moisture-tolerant primer, followed by a highly-flexible epoxy/urethane hybrid membrane coating. The system receives an additional epoxy/urethane hybrid membrane coating broadcast with silica aggregate. The system is top coated with a GlossGrip-enhanced high-performance urethane. This shop floor is suited for liquid processing and elevated areas where durability and flexibility are a requirement.

### System Advantages:

- Designed to withstand wide range of movement without gaining rigidity
- Better impact resistance than standard epoxy systems
- Excellent gloss retention
- Easy-to-clean
- Flexible, moderate modulus

### System Installation Overview:

1. Apply Protect 1200 WR primer to properly prepared substrate and allow to cure
2. Apply Protect 1800 Flex base coat and allow to cure
3. Apply Protect 1800 Flex body coat broadcast\* with silica aggregate and allow to cure
4. Apply Protect 2000 GG topcoat and allow to cure