


InhibiWear BC-TS

Thermal Shock-Resistant Broadcast System

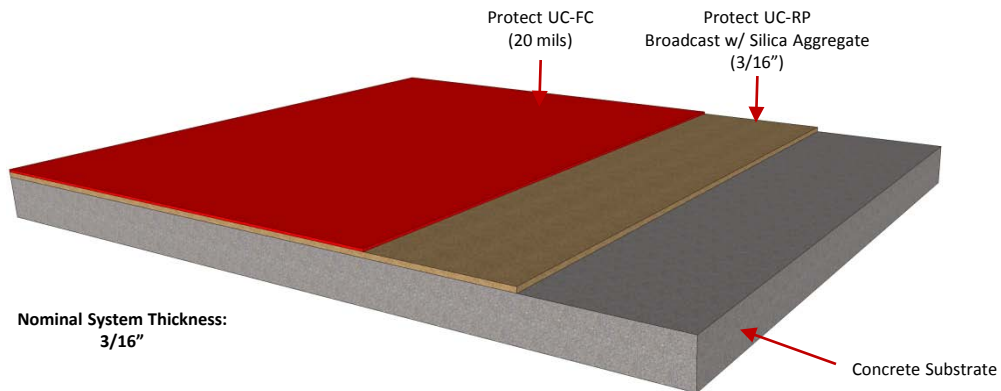

System Description:

A broadcast floor system consisting of a self-priming, self-leveling, thermal shock-resistant urethane concrete overlay broadcast with silica aggregate. The system is then top coated with a thermal shock-resistant urethane concrete finish coat. This system exhibits thermal expansion rates similar to that of concrete, making it an ideal choice for shop areas exposed to hot and cold-water washdowns.

System Advantages:

- Self-priming
- Self-leveling
- Durable, heavy-duty system
- Excellent thermal-shock resistance up to 215°F
- Easy to clean and maintain

System Installation Overview:

1. Apply Protect UC-RP broadcast with silica aggregate and allow to cure
2. Apply Protect UC-FC finish coat and allow to cure