


## InhibiWear BC-Xtreme Extreme Wear Broadcast System

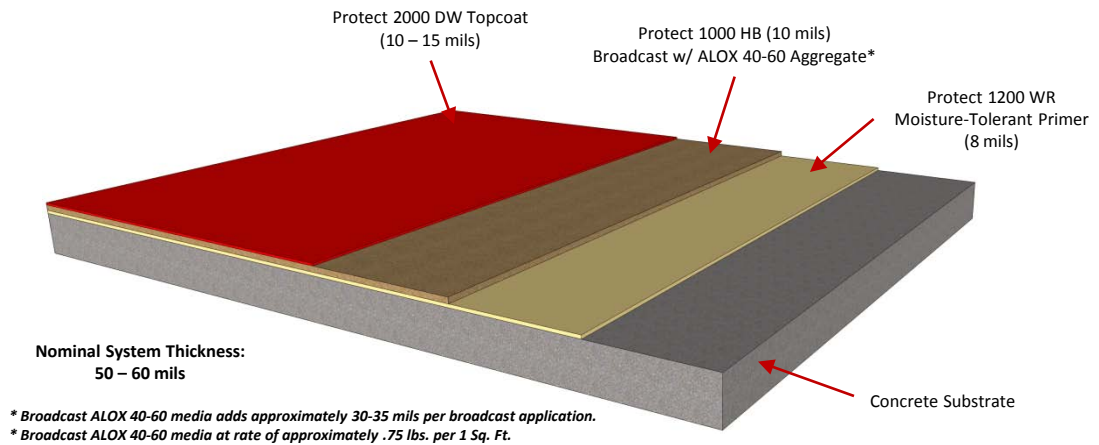

### System Description:

A broadcast floor system consisting of a moisture-tolerant primer followed by an intermediate high-build epoxy broadcast with aluminum oxide aggregate. The system is top coated with a DiamondWear-enhanced high-performance urethane topcoat. This extreme wearing broadcast system is suited for shop areas exposed to heavy wheel and foot traffic, such as aisleways and warehouse areas. This system exhibits a satin finish and can be pigmented in a vast array of colors.

### System Advantages:

- Light-reflective satin texture
- Resists dulling of surface
- Up to 300% greater wear than standard epoxy
- Longer service life
- Lower maintenance costs
- Available in a wide array of colors

### System Installation Overview:

1. Apply Protect 1200 WR primer to properly prepared substrate and allow to cure
2. Apply Protect 1000 HB body coat broadcast\* with ALOX 40-60 aggregate and allow to cure
3. Apply Protect 2000 DW topcoat and allow to cure