


InhibiWear HB-Flex Flexible High-Build Coating System

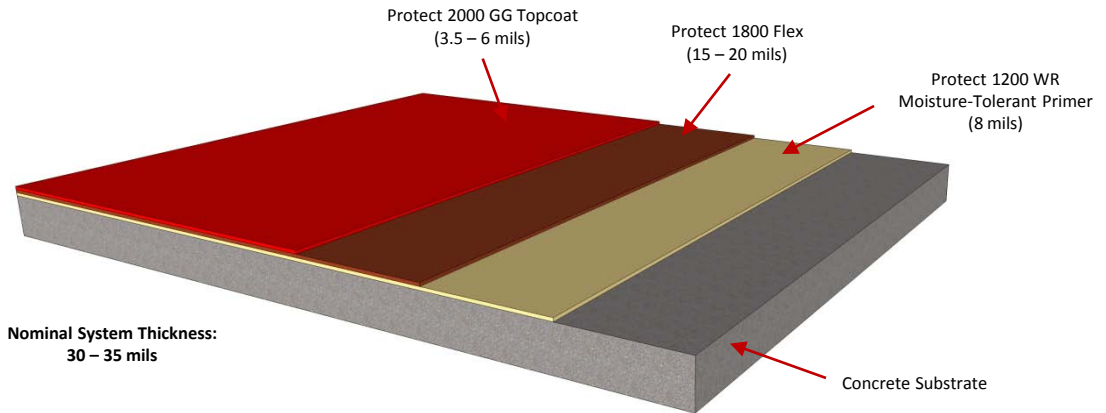

System Description:

This flexible coating system consists of a moisture-tolerant primer, followed by a highly-flexible epoxy/urethane hybrid membrane coating. The system is top coated with a GlossGrip-enhanced high-performance urethane. This system is suited for liquid processing and elevated areas where a flexible membrane system is required.

System Advantages:

- Designed to withstand wide range of movement without gaining rigidity
- Better impact resistance than standard epoxy systems
- Excellent gloss retention
- Easy-to-clean
- Flexible, moderate modulus

System Installation Overview:

1. Apply Protect 1200 WR primer to properly prepared substrate and allow to cure
2. Apply Protect 1800 Flex and allow to cure
3. Apply Protect 2000 GG and allow to cure