


## InhibiWear HB-Xtreme Extreme Wear High-Build Coating System

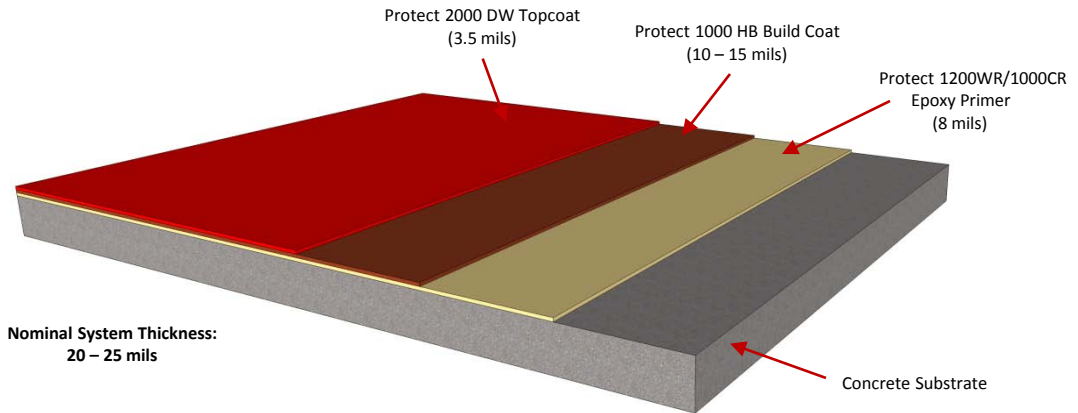

### System Description:

This system consists of a moisture-tolerant primer followed by an intermediate high-build epoxy coat. The system is top coated with a DiamondWear-enhanced high-performance urethane topcoat. This extreme wearing coating system is suited for areas exposed to heavy wheel and foot traffic, such as aisleways and warehouse areas. This system exhibits a satin finish and can be pigmented in a vast array of colors.

### System Advantages:

- Light-reflective satin texture
- Resists dulling of surface
- Up to 300% greater wear than standard epoxy
- Longer service life
- Lower maintenance costs
- Available in a wide array of colors

### System Installation Overview:

1. Apply Protect 1200 WR or 1000 CR primer to properly prepared substrate and allow to cure
2. Apply Protect 1000 HB build coat and allow to cure
3. Apply Protect 2000 DW topcoat and allow to cure