


## InhibiWear SL-Flex Flexible Slurry System

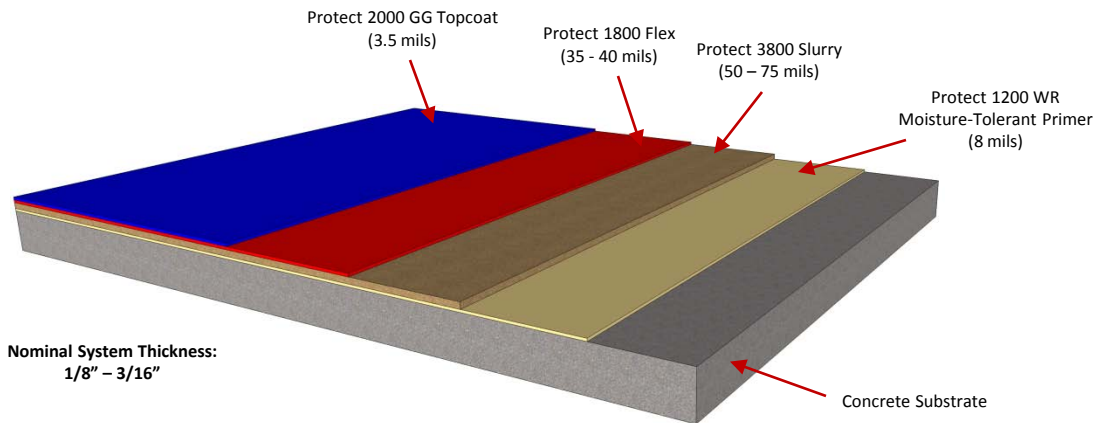

### System Description:

A flexible slurry/resurfacer system consisting of a moisture-tolerant primer, followed by a highly-flexible epoxy slurry. The system then receives an hybrid membrane coating and is top coated with a GlossGrip-enhanced high-performance urethane. This system is ideal for restoring old or slightly damaged concrete and is suited for liquid processing and elevated areas where durability and flexibility are a requirement.

### System Advantages:

- Designed to withstand wide range of movement without gaining rigidity
- Available in a variety of colors
- Excellent gloss retention
- Easy-to-clean
- Permanently flexible, moderate modulus

### System Installation Overview:

1. Apply Protect 1200 WR primer to properly prepared substrate and allow to cure
2. Apply Protect 3800 Slurry and allow to cure
3. Apply Protect 1800 Flex and allow to cure
4. Apply Protect 2000 GG topcoat and allow to cure