


InhibiWear SL-TS

Thermal Shock-Resistant Slurry System

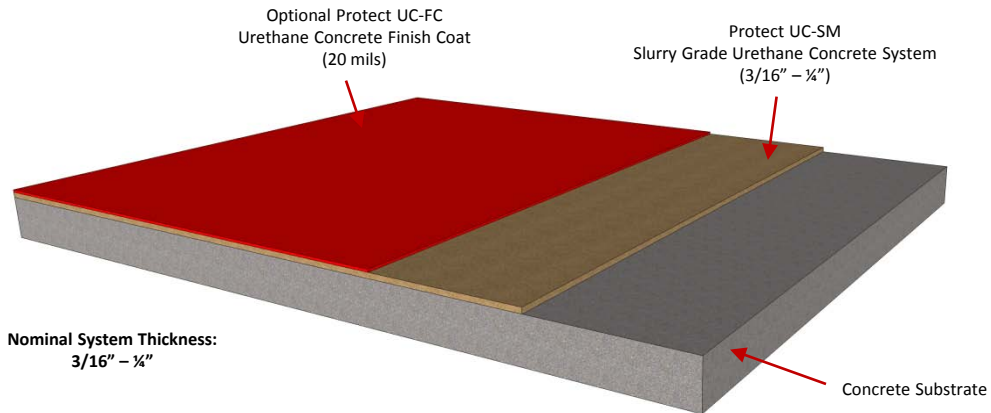

System Description:

A slurry/resurfacer system consisting of a self-priming, self-leveling, thermal shock-resistant urethane concrete slurry overlay. As an option, this system can be top coated with a thermal shock-resistant urethane concrete finish coat. This system exhibits thermal expansion rates similar to that of concrete, making it an ideal choice for shop areas exposed to thermal cycling from hot and cold-water washdowns.

System Advantages:

- Self-priming
- Self-leveling
- Virtually odorless
- Durable, heavy-duty system
- Excellent thermal-shock resistance up to 215°F
- Easy to clean and maintain

System Installation Overview:

1. Apply Protect UC-SM slurry grade urethane concrete system and allow to cure.
2. Apply Optional Protect UC-FC urethane concrete finish coat and allow to cure.