


## InhibiWear SL-Xtreme Extreme Wear Slurry System

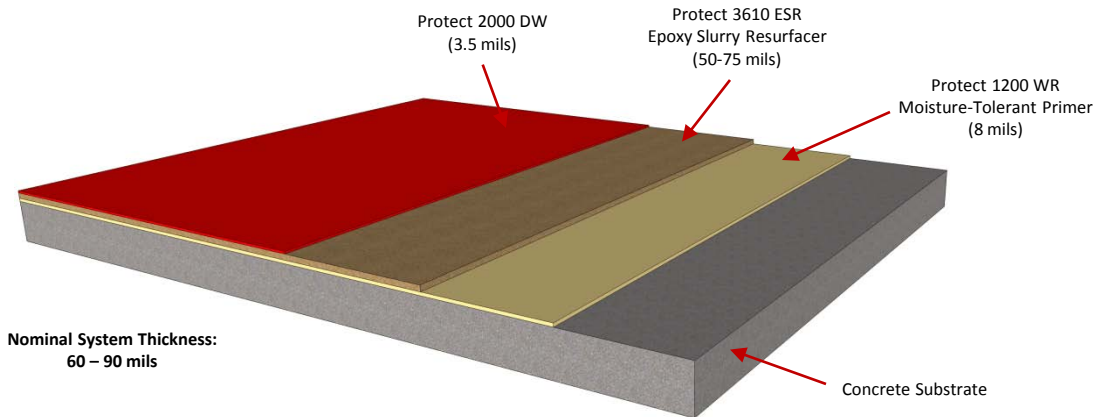

### System Description:

A slurry/resurfacer system consisting of a moisture-tolerant primer followed by an epoxy slurry. The system is top coated with a DiamondWear-enhanced high-performance urethane topcoat. This extreme wearing slurry system is suited for areas exposed to heavy foot traffic, such as aisleways and warehouse areas. This system exhibits an extremely abrasion-resistant surface and can be pigmented in a vast array of colors.

### System Advantages:

- Extremely low odor
- Self levels to a smooth surface
- Excellent abrasion resistance
- Restores old or damaged concrete
- Longer service life
- Lower maintenance costs
- Available in a wide array of UV-stable colors

### System Installation Overview:

1. Apply Protect 1200 WR primer to properly prepared substrate and allow to cure
2. Apply Protect 3610 ESR epoxy slurry resurfacer and allow to cure
3. Apply Protect 2000 DW topcoat and allow to cure