


RestaurantSpec TX Textured Antimicrobial Seamless Flooring System

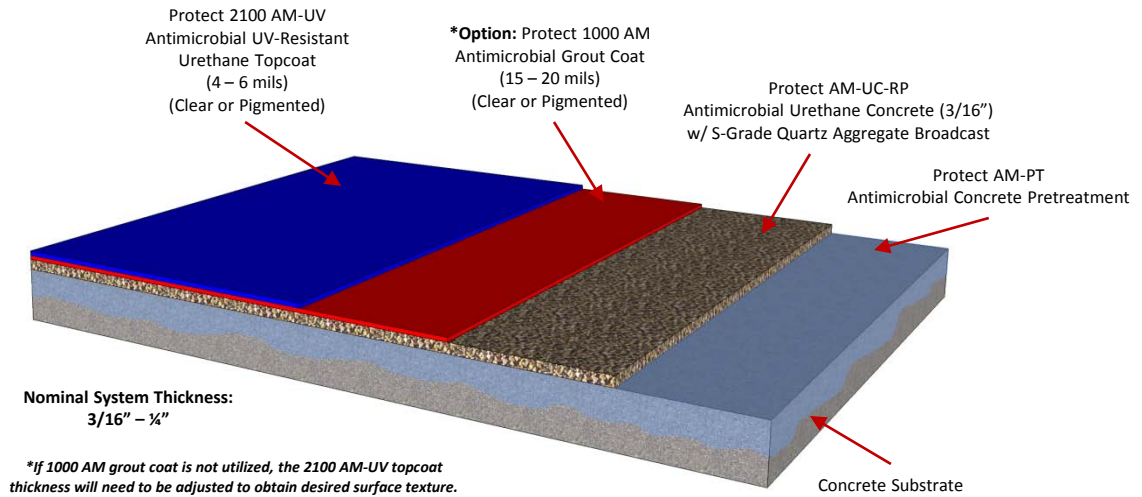

System Description:

A high-performance textured antimicrobial flooring system consisting of an antimicrobial concrete pretreatment, followed by the application of an antimicrobial urethane concrete broadcast with S-Grade quartz aggregate (solid color or decorative blend). The system can be grout coated with an antimicrobial epoxy and/or top coated with an aliphatic high-performance UV-resistant antimicrobial urethane. This system offers a safe, slip-resistant surface that is resistant to thermal cycling from hot and cold water washdowns.

System Advantages:

- Redundant system protects against microbe growth
- Antimicrobial protection penetrates up to 6" within concrete slab
- Seamless, no grout lines
- Enhanced slip-resistance
- Easy to clean and sanitize
- USDA-compliant/CFIA-approved
- Quick turnaround minimizes downtime
- Antimicrobial properties effective for life of floor system

System Installation Overview:

1. Dampen concrete substrate prior to applying Protect AM-PT
2. Spray-apply Protect AM-PT in two passes and allow to fully purge concrete
3. Apply Protect AM-UC-RP with S-Grade Quartz broadcast and allow to cure
4. **Option:** Apply Protect 1000 AM grout coat and allow to cure
5. Apply Protect 2100 AM-UV topcoat and allow to cure