


DataSpec CS High-Performance Static-Control Coating System

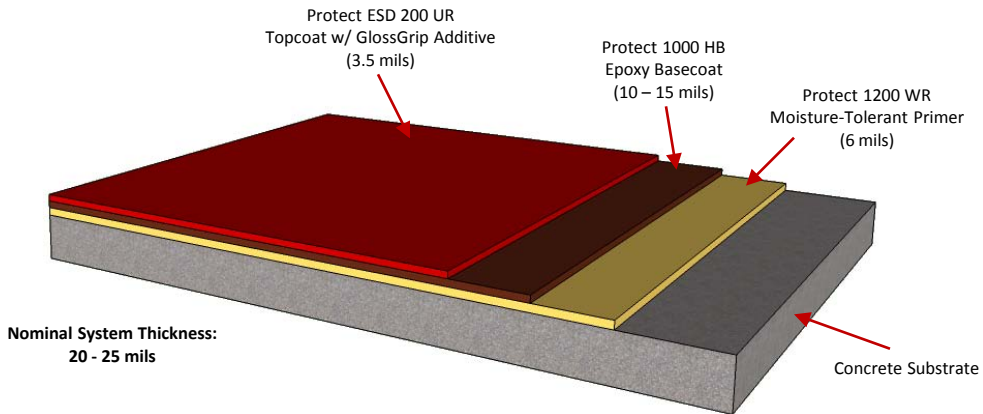

System Description:

A three coat high-build static-control coating system utilizing a moisture-tolerant primer followed by a high-build epoxy intermediate coat. The system is topcoated with a high-performance ESD-control urethane. This system produces a glossy, chemical-resistant, light-reflective surface and is recommended for re-coat and standard performance requirements in data/equipment rooms or any general use area where the damaging effects of electrostatic discharge cannot be tolerated.

System Advantages:

- GlossGrip additive prevents wear damage in critical tower aisles
- Very low-odor
- Available in near-white for maximum light reflection
- Particulate technology maintains ESD properties throughout entire ESD coating thickness
- Available in Static Dissipative or Conductive ranges (special order for conductive)
- Complies with all ANSI S20.20 revisions
- Exceeds ESD STM 97.1/97.2 requirements
- Dissipates 5000 volt charge to 0 volts in less than 0.1 second
- Extremely low Body Voltage Generation (BVG)

System Installation Overview:

1. Apply Protect 1200 WR primer to properly prepared substrate and allow to cure
2. Apply Protect 1000 HB build coat and allow to cure
3. Apply Protect 200 ESD UR with GlossGrip additive and allow to cure



All DataSpec floor coating systems can be enhanced with PIP's proprietary Gloss-Grip Technology. This additive greatly enhances both the safety and wear characteristics of your floor coating system while retaining a slip-resistant, yet high-gloss, finish that is easy to clean and maintain. These systems not only exhibit longer service lives; they help you save money by reducing maintenance costs.