


InhibiStat BC-Flex Flexible ESD-Control Broadcast System

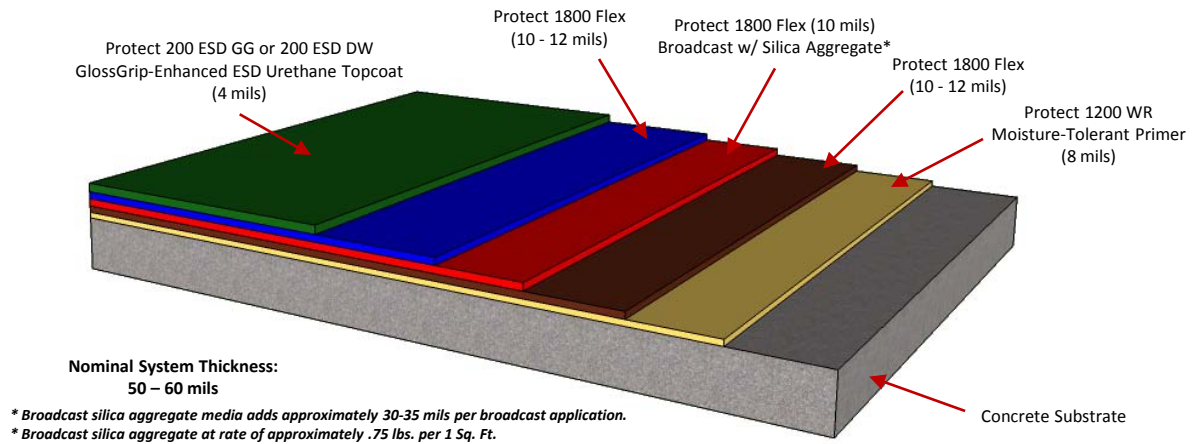

System Description:

An ESD-control flexible broadcast system consisting of a moisture-tolerant primer, three coats of a highly-flexible epoxy/urethane hybrid membrane coating silica sand broadcast, and top coat of an ESD high-performance urethane enhanced with GlossGrip safety gloss and wear additive. This system is suited for liquid processing and elevated areas where ESD-control, durability and flexibility are a requirement.

ESD-Control Properties:

All InhibiStat systems have been designed to meet and/or exceed current compliance standards (ANSI/IEC).

- Available in Static Dissipative or Conductive Ranges
- Dissipates 5000 volt charge to 0 volts in less than 0.1 second
- Extremely low Body Voltage Generation (BVG)

System Advantages:

- Designed to withstand wide range of movement without gaining rigidity
- Better impact resistance than standard epoxy systems
- Excellent gloss retention
- Easy-to-clean
- Flexible, moderate modulus

System Installation Overview:

1. Apply Protect 1200 WR primer to properly prepared substrate and allow to cure
2. Apply Protect 1800 Flex base coat and allow to cure
3. Apply Protect 1800 Flex body coat broadcast* with silica aggregate and allow to cure
4. Apply Protect 1800 Flex grout coat and allow to cure
5. Apply Protect 200 ESD GG or 200 ESD DW topcoat and allow to cure