


## InhibiStat HB-CR

### Chemical-Resistant ESD-Control High-Build Coating System

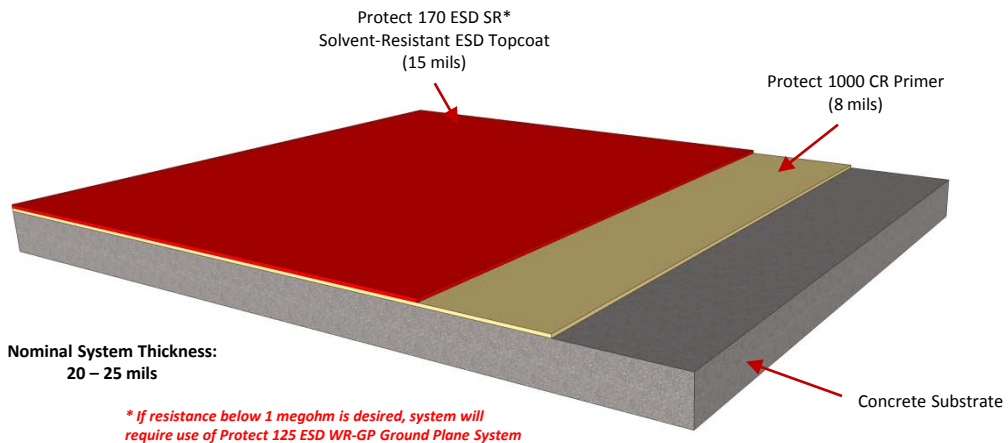

#### System Description:

This ESD-control system consists of a chemical-resistant epoxy primer top coated with a highly solvent and chemical-resistant ESD epoxy novalac. This semi-gloss coating system is designed to withstand a wide array of chemical contact including strong acids, caustics and solvents. Suited for general-use areas requiring excellent overall chemical resistance combined with superior ESD-control characteristics.

#### ESD-Control Properties:

All InhibiStat systems have been designed to meet and/or exceed current compliance standards (ANSI/IEC).

- Available in Static Dissipative or Conductive Ranges
- Dissipates 5000 volt charge to 0 volts in less than 0.1 second
- Extremely low Body Voltage Generation (BVG)

#### System Advantages:

- Available in a wide array of colors
- Excellent impact and abrasion resistance
- Excellent chemical resistance
- Extremely hard, semi-gloss finish

#### System Installation Overview:

1. Apply Protect 1000 CR primer to properly prepared substrate and allow to cure
2. **If resistance below 1 megohm is required, apply Protect 125 ESD WR-GP ground plane**
3. Apply Protect 170 ESD SR topcoat and allow to cure