


InhibiStat HB-Flex

Flexible ESD-Control High-Build Coating System

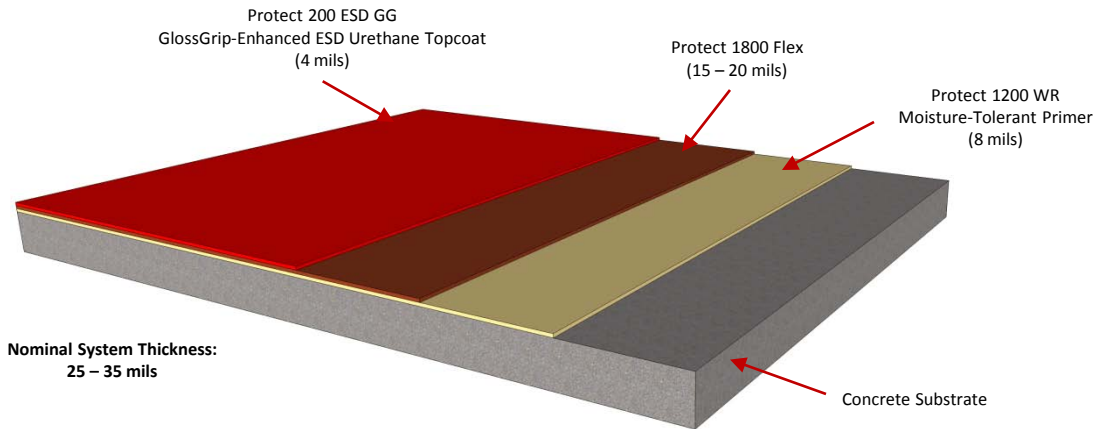

System Description:

This ESD-control flexible coating system consists of a moisture-tolerant primer, a highly-flexible epoxy/urethane hybrid membrane, and a top coat of an ESD high-performance urethane enhanced with GlossGrip safety gloss and wear additive. This system is suited for liquid processing and elevated areas where a flexible membrane and ESD protection is required.

ESD-Control Properties:

All InhibiStat systems have been designed to meet and/or exceed current compliance standards (ANSI/IEC).

- Available in Static Dissipative or Conductive Ranges
- Dissipates 5000 volt charge to 0 volts in less than 0.1 second
- Extremely low Body Voltage Generation (BVG)

System Advantages:

- Designed to withstand wide range of movement without gaining rigidity
- Better impact resistance than standard epoxy systems
- Excellent gloss retention
- Easy-to-clean
- Flexible, moderate modulus

System Installation Overview:

1. Apply Protect 1200 WR primer to properly prepared substrate and allow to cure
2. Apply Protect 1800 Flex and allow to cure
3. Apply Protect 200 ESD GG and allow to cure