


InhibiStat HB-G

General Use High-Build ESD-Control Coating System

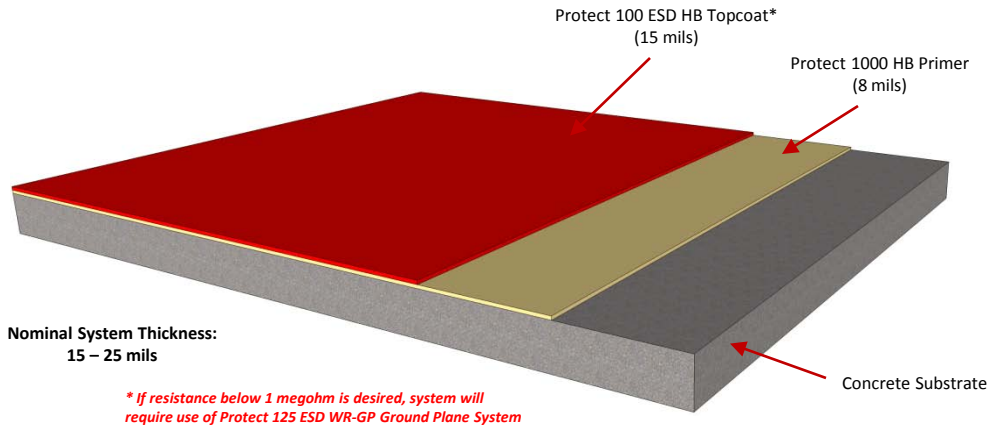

System Description:

This ESD-control system consists of an epoxy primer, followed by a high-build ESD epoxy topcoat. This general use low-odor coating system can be pigmented in a variety of colors, and features excellent impact and abrasion resistance. Suited for use in general traffic areas where ESD control, aesthetics and cleanability are a requirement.

ESD-Control Properties:

All InhibiStat systems have been designed to meet and/or exceed current compliance standards (ANSI/IEC).

- Available in Static Dissipative or Conductive Ranges
- Dissipates 5000 volt charge to 0 volts in less than 0.1 second
- Extremely low Body Voltage Generation (BVG)

System Advantages:

- Extremely low odor
- High-build application
- Excellent impact and abrasion resistance
- Seals substrate reducing water vapor intrusion
- Resists staining from general cleaning chemicals
- Available in a wide array of colors

System Installation Overview:

1. Apply Protect 1000 HB primer to properly prepared substrate and allow to cure
2. **If resistance below 1 megohm is required, apply Protect 125 ESD WR-GP ground plane**
3. Apply Protect 100 ESD HB topcoat and allow to cure