


InhibiStat HB-MB

Moisture-Breathable ESD-Control High-Build Coating System

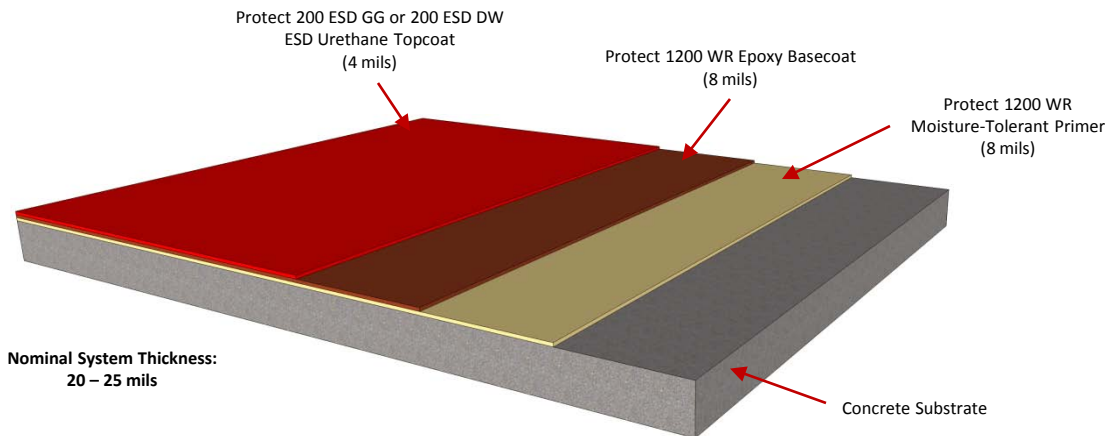

System Description:

This ESD-control system consists of a moisture-tolerant epoxy primer and basecoat, top coated with an additive-enhanced high-performance urethane topcoat. This breathable coating system is suited for areas requiring a coating that will allow pass through of moisture vapor transmission combined with ESD-control performance.

ESD-Control Properties:

All InhibiStat systems have been designed to meet and/or exceed current compliance standards (ANSI/IEC).

- Available in Static Dissipative or Conductive Ranges
- Dissipates 5000 volt charge to 0 volts in less than 0.1 second
- Extremely low Body Voltage Generation (BVG)

System Advantages:

- Moisture-breathable
- Longer service life
- Lower maintenance costs
- Available in a wide array of colors

System Installation Overview:

1. Apply Protect 1200 WR primer to properly prepared substrate and allow to cure
2. Apply Protect 1200 WR basecoat and allow to cure
3. Apply Protect 200 ESD GG or 200 ESD DW topcoat and allow to cure