


InhibiStat MT-FS Fast-Cure ESD-Control Mortar System

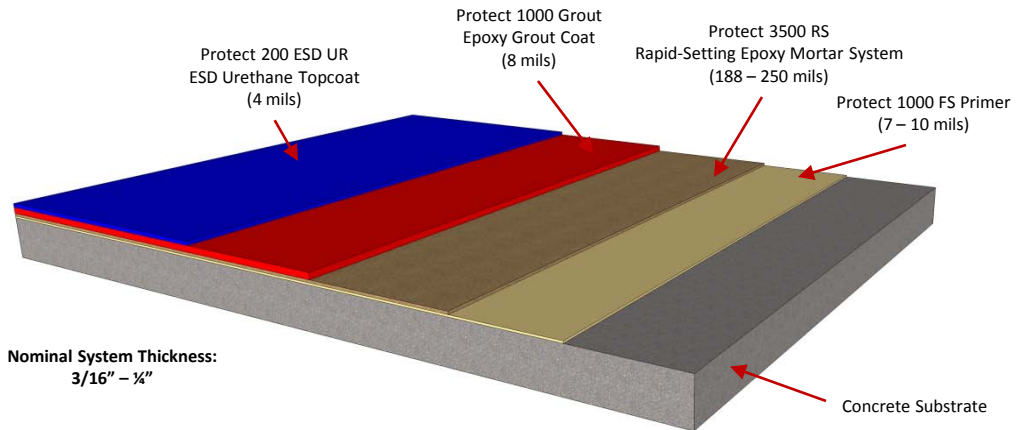

System Description:

An ESD-control, general use, fast-cure, heavy-duty mortar system consisting of a fast-setting epoxy primer, a trowel-applied rapid-setting epoxy mortar, fast setting epoxy grout coat, and a top coat of an ESD high-performance urethane. This mortar system will resurface badly damaged concrete to a new, more durable surface. Suited for fast-tracking industrial concrete resurfacing applications where there is a limited shutdown window and ESD protection is required.

ESD-Control Properties:

All InhibiStat systems have been designed to meet and/or exceed current compliance standards (ANSI/IEC).

- Available in Static Dissipative or Conductive Ranges
- Dissipates 5000 volt charge to 0 volts in less than 0.1 second
- Extremely low Body Voltage Generation (BVG)

System Advantages:

- Very durable
- Excellent chemical resistance
- Resurfaces damaged concrete substrates
- Very good impact and abrasion resistance
- Quick turnaround with minimal downtime
- Available in a wide array of colors

System Installation Overview:

1. Apply Protect 1000 FS primer to properly prepared substrate and allow to cure
2. Apply Protect 3500 RS rapid-setting epoxy mortar system and allow to cure
3. Apply Protect 1000 Grout epoxy grout coat and allow to cure
4. Apply Protect 200 ESD UR urethane topcoat and allow to cure