


InhibiStat MT-Xtreme Extreme Wear ESD-Control Mortar System

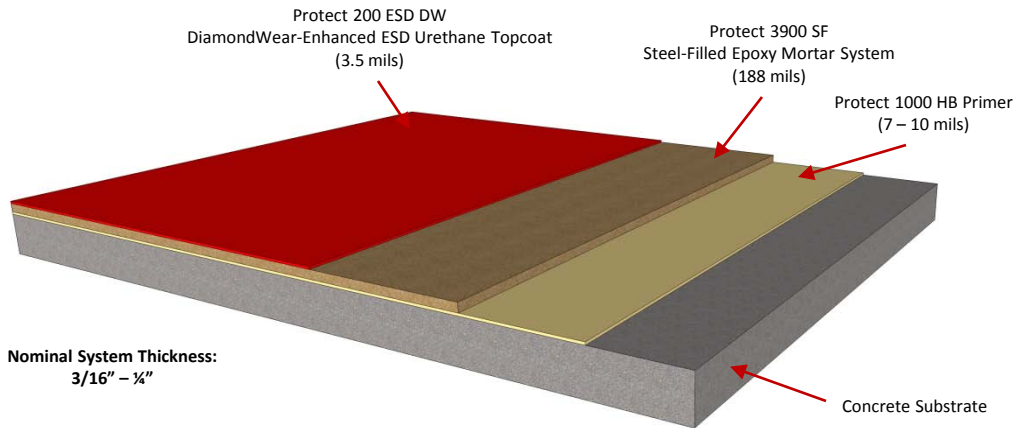

System Description:

An ESD-control, extreme-wearing, heavy-duty mortar system consisting of an epoxy primer, a trowel-applied, steel-filled epoxy mortar and top coat of a high performance ESD urethane enhanced with DiamondWear Extreme Wear and Abrasion Additive. This mortar system will resurface badly damaged concrete to a new, more durable surface. This system is suited for the most demanding industrial applications where the floor is subject to high wear and impact and requires ESD protection.

ESD-Control Properties:

All InhibiStat systems have been designed to meet and/or exceed current compliance standards (ANSI/IEC).

- Available in Static Dissipative or Conductive Ranges
- Dissipates 5000 volt charge to 0 volts in less than 0.1 second
- Extremely low Body Voltage Generation (BVG)

System Advantages:

- Steel-Reinforced for superior durability
- Excellent chemical resistance
- Extremely high-wearing topcoat
- Resurfaces damaged concrete substrates
- Superior impact and abrasion resistance
- Available in a wide array of colors

System Installation Overview:

1. Apply Protect 1000 HB primer to properly prepared substrate and allow to cure
2. Apply Protect 3900 SF steel-filled epoxy mortar system and allow to cure
3. Apply Protect 200 ESD DW topcoat and allow to cure