


InhibiStat SL-FS

Fast-Cure ESD-Control Slurry System

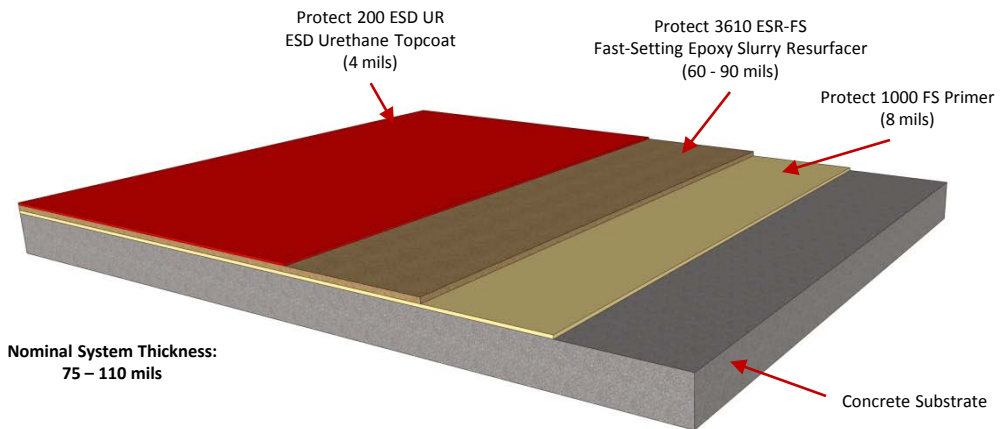

System Description:

An ESD-control slurry/resurfacer system consisting of a fast-setting epoxy primer, a fast-setting epoxy slurry and a top coat of an ESD high-performance urethane. This system is ideal for areas exposed to general foot and wheeled traffic. This system is suited for areas with minimal shutdown windows where quick return to service and ESD protection is a requirement.

ESD-Control Properties:

All InhibiStat systems have been designed to meet and/or exceed current compliance standards (ANSI/IEC).

- Available in Static Dissipative or Conductive Ranges
- Dissipates 5000 volt charge to 0 volts in less than 0.1 second
- Extremely low Body Voltage Generation (BVG)

System Advantages:

- Quick turnaround for minimal shutdown windows
- Very low odor
- UV-resistant
- Restores old or damaged concrete
- Good resistance to most common chemicals and cleaners
- Available in a wide array of colors

System Installation Overview:

1. Apply Protect 1000 FS primer to properly prepared substrate and allow to cure
2. Apply Protect 3610 ESR-FS fast-setting epoxy slurry resurfacer and allow to cure
3. Apply Protect 200 ESD UR topcoat and allow to cure