


## InhibiStat SL-Flex Flexible ESD-Control Slurry System

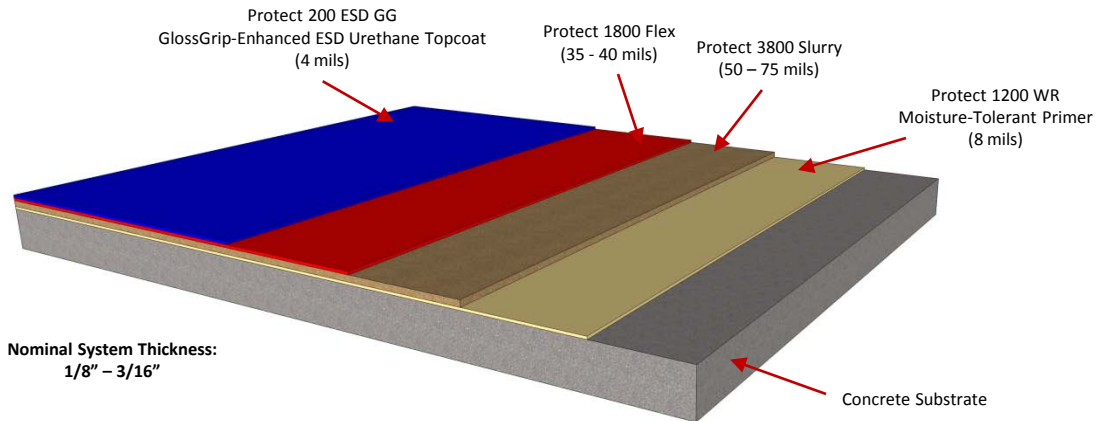

### System Description:

An ESD-control flexible slurry/resurfacer system consisting of a moisture-tolerant primer, a highly-flexible epoxy slurry, a hybrid membrane coating and top coat of an ESD high-performance urethane enhanced with GlossGrip safety gloss and wear additive. This system is ideal for restoring old or slightly damaged concrete and is suited for liquid processing and elevated areas where ESD protection, durability and flexibility are a requirement.

### ESD-Control Properties:

All InhibiStat systems have been designed to meet and/or exceed current compliance standards (ANSI/IEC).

- Available in Static Dissipative or Conductive Ranges
- Dissipates 5000 volt charge to 0 volts in less than 0.1 second
- Extremely low Body Voltage Generation (BVG)

### System Advantages:

- Designed to withstand wide range of movement without gaining rigidity
- Available in a variety of colors
- Excellent gloss retention
- Easy-to-clean
- Permanently flexible, moderate modulus

### System Installation Overview:

1. Apply Protect 1200 WR primer to properly prepared substrate and allow to cure
2. Apply Protect 3800 Slurry and allow to cure
3. Apply Protect 1800 Flex and allow to cure
4. Apply Protect 200 ESD GG topcoat and allow to cure