


InhibiStat SL-Xtreme Extreme Wear ESD-Control Slurry System

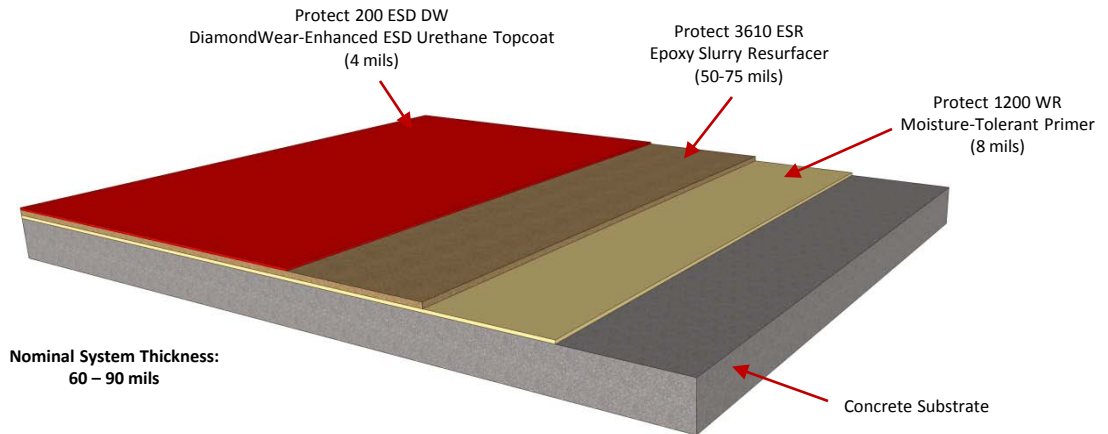

System Description:

The system consists of a moisture-tolerant primer, an epoxy slurry resurfacer and top coat of a high performance ESD urethane enhanced with DiamondWear Extreme Wear and Abrasion Additive. This extreme wearing slurry system is suited for areas requiring ESD protection exposed to heavy foot traffic, such as aisleways and warehouse areas. This system exhibits an extremely abrasion-resistant surface and can be pigmented in a vast array of colors.

ESD-Control Properties:

All InhibiStat systems have been designed to meet and/or exceed current compliance standards (ANSI/IEC).

- Available in Static Dissipative or Conductive Ranges
- Dissipates 5000 volt charge to 0 volts in less than 0.1 second
- Extremely low Body Voltage Generation (BVG)

System Advantages:

- Extremely low odor
- Self levels to a smooth surface
- Excellent abrasion resistance
- Restores old or damaged concrete
- Longer service life
- Lower maintenance costs
- Available in a wide array of UV-stable colors

System Installation Overview:

1. Apply Protect 1200 WR primer to properly prepared substrate and allow to cure
2. Apply Protect 3610 ESR epoxy slurry resurfacer and allow to cure
3. Apply Protect 200 ESD DW topcoat and allow to cure