


InhibiWear BC-G General Use Broadcast System

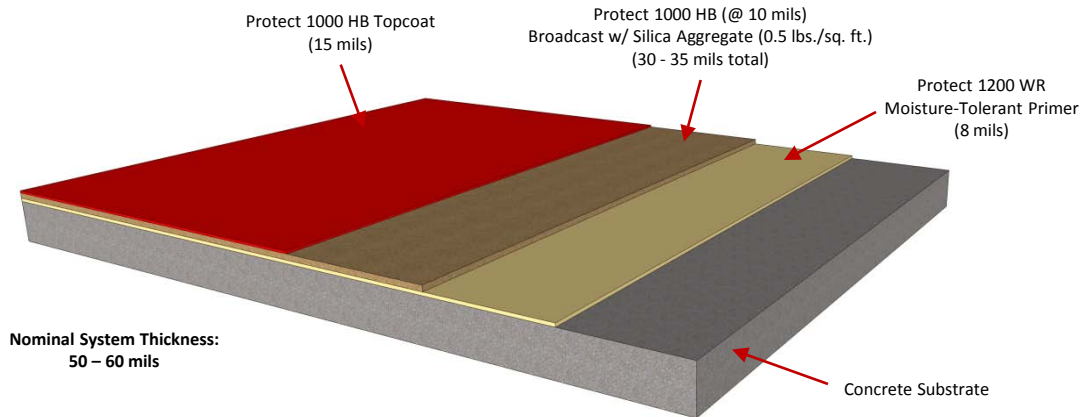

System Description:

A broadcast floor system consisting of moisture-tolerant primer, followed by a high-build epoxy broadcast with silica aggregate. The system is then top coated with a high-build epoxy. This general use low-odor broadcast system can be pigmented in a variety of colors, and features excellent impact and abrasion resistance. Suited for use in general shop areas where aesthetics and cleanability are a requirement.

System Advantages:

- Extremely low odor
- High-build application
- Excellent impact and abrasion resistance
- Seals substrate reducing water vapor intrusion
- Resists staining from general cleaning chemicals
- Available in a wide array of colors

System Installation Overview:

1. Apply Protect 1200 WR primer to properly prepared substrate and allow to cure
2. Apply Protect 1000 HB body coat, broadcast with silica aggregate and allow to cure
3. Apply Protect 1000 HB topcoat and allow to cure