


InhibiWear SL-FS Fast-Cure Slurry System

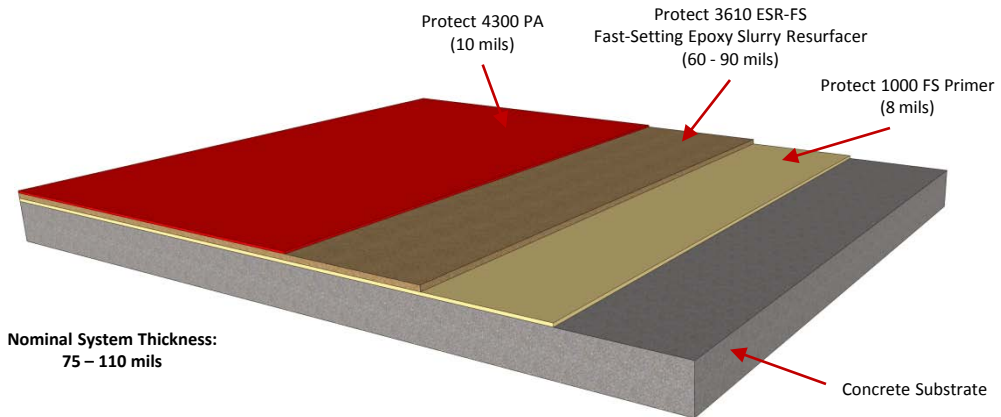

System Description:

A slurry/resurfacer system consisting of a fast-setting epoxy primer followed by a fast-setting epoxy slurry. The system is top coated with a fast-curing polyaspartic topcoat. This system is ideal for areas exposed to general foot and wheeled traffic. This system is suited for areas with minimal shutdown windows where quick return to service is a requirement.

System Advantages:

- Quick turnaround for minimal shutdown windows
- Very low odor
- UV-resistant
- Restores old or damaged concrete
- Good resistance to most common chemicals and cleaners
- Available in a wide array of colors

System Installation Overview:

1. Apply Protect 1000 FS primer to properly prepared substrate and allow to cure
2. Apply Protect 3610 ESR-FS fast-setting epoxy slurry resurfacer and allow to cure
3. Apply Protect 4300 PA topcoat and allow to cure